


BUCKETS & ROAD SAW

SEVERE DUTY BUCKET

- Low profile: 20" tall, 29" deep
- Long bottom: 20" tall, 36" deep
- High capacity: 24" tall, 38" deep
- Standard sizes: 66", 72", 78", 84" & 90", smooth or tooth
- Long bottom sizes: 72", 78", 84" & 90", smooth or tooth
- 1" x 8" cutting edge (tooth only)
- Smooth includes bolt-on edge
- 1/2" bottom, double-layer 1/4" back

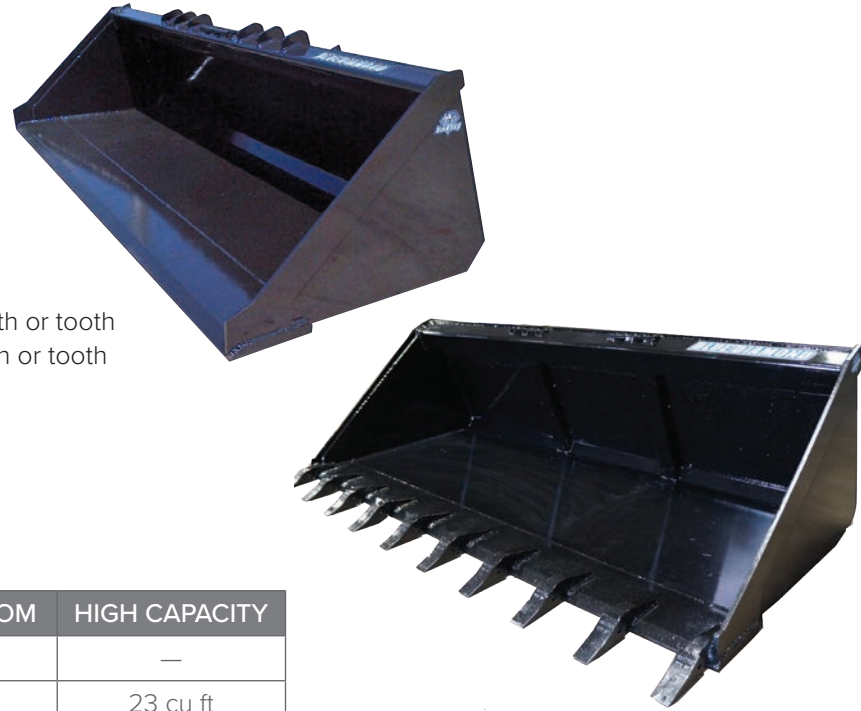

SIZE	STD BOTTOM	LONG BOTTOM	HIGH CAPACITY
66"	11.4 cu ft	—	—
72"	11 cu ft	15.2 cu ft	23 cu ft
78"	12 cu ft	16.47 cu ft	25 cu ft
84"	12.9 cu ft	17.74 cu ft	27 cu ft



SLAB BUCKET

- 3/4" sides
- 1" x 8" cutting edge
- Cast replaceable teeth
- Reinforced quick attach for prying
- Powder coat paint

PART NUMBER	MODEL	WEIGHT
108895	Slab Bucket	600 lbs



Call **888-376-7027** for more information on Blue Diamond® Attachments complete line of asphalt attachments!

888-376-7027

BlueDiamondAttachments.com

ROAD SAW

- Hydraulic side shift: 0—26"
- Ground-engaging frame
- Planetary reduction drives



PART NUMBER	MODEL	WEIGHT
161000	10" Cut Depth, Saw (Req Cutting Wheel)	1,196 lbs
161005	18" Cut Depth, Saw (Req Cutting Wheel)	1,972 lbs
161505	10" Depth X 2.5"W Cutting Wheel	127 lbs
161510	10" Depth X 4.5"W Cutting Wheel	165 lbs
161530	18" Depth X 3"W Cutting Wheel	372 lbs
161533	18" Depth X 4.5"W Cutting Wheel	426 lbs
161535	18" Depth X 6"W Cutting Wheel	481 lbs



ABOUT BLUE DIAMOND® ATTACHMENTS

Blue Diamond® Attachments is a trusted and reliable company. Established in 1995, Blue Diamond® is a widely recognized name in the global attachments industry. We are committed to unparalleled customer service from the very first call to the after-sale follow-up and service.

In today's fast-paced environment, delivering quickly and on time are key to success. Blue Diamond® Attachments is very different in the fact that we stock thousands of finished products in our warehouses every day ready to ship. This results in a big advantage for our customers with many shipments leaving in 2–3 days. Our Tennessee facilities alone are now over 250,000-square-feet situated on 32 acres. These facilities, along with streamlined processes, allow most of our orders to leave our facility within 10 days.

YOUR AUTHORIZED BLUE DIAMOND DEALER IS:

Our parts department keeps thousands of replacement parts at the ready and strives to ship all parts orders received before noon the same day the order is placed! Tracking numbers are sent to our customer the day after the shipment leaves our dock.

We are located in Knoxville, Tennessee. This central location allows our products to reach more than half of the United States population within 2–3 days' shipping time. We have many loading docks, which allow us to keep trailers from several freight companies, making use of the best freight lines available. In addition, we are the only 1-day point of export to multiple foreign ports.



4512 Anderson Road | Knoxville, TN 37918
ph 888-376-7027 | fax 865-246-2007



©2023 Blue Diamond® Attachments.
All Rights Reserved.



ASPHALT ATTACHMENT GUIDE



888-376-7027

info@bluediamondattachments.com

BlueDiamondAttachments.com

865-246-2007

4512 Anderson Rd., Knoxville, TN 37918

Monday - Friday, 7am - 6pm EST

BlueDiamondAttachments.com




COMPLETE ATTACHMENT SOLUTIONS




COLD PLANERS

The Blue Diamond® Cold Planer has the most side shift off center in the industry. The side shift extreme limit is 66" from the right extreme limit.

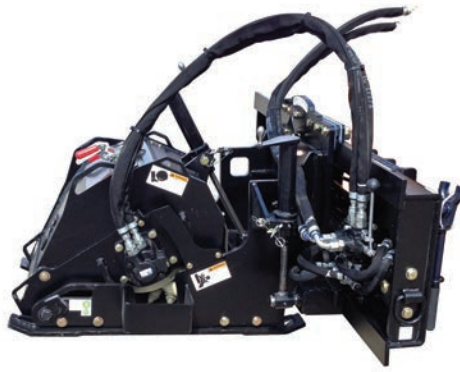

COLD PLANER LOW-FLOW

- Manual adjustment controls
- Hydraulic side shift
- Direct drive
- High drum weight = less vibration
- 5/8" thick drum tube
- Easy access tooth replacement
- Water kit available
- Fine-cut drum available
- 12"-16" grinding widths
- Up to 5" cutting depth

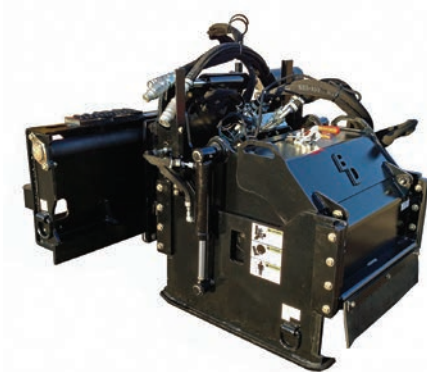

COLD PLANER HIGH-FLOW

- Electronic adjustment controls
- High-torque, planetary drive
- High drum weight = less vibration
- 5/8" thick drum tube
- Easy access tooth replacement
- Water kit available
- Fine-cut drum available
- 16"-48" grinding widths
- Up to 6" cutting depth



COLD PLANER SEVERE DUTY HIGH-FLOW

- Electronic adjustment controls
- High-torque, planetary drive
- High drum weight = less vibration
- 1 1/2" thick drum tube
- Easy access tooth replacement
- Water kit available
- Fine-cut drum available
- 18"-48" grinding widths
- Up to 8" cutting depth



PART NUMBER	MODEL	# OF TEETH	WEIGHT
160105	12" Low Flow	30	1,220 lbs
160110	16" Low Flow	38	1,250 lbs
160220-HP	16" High Flow	38	1,770 lbs
160225-HP	18" High Flow	40	1,810 lbs
160230-HP	24" High Flow	50	1,980 lbs
160235-HP	30" High Flow	60	2,160 lbs
160240-HP	40" High Flow	76	2,455 lbs
160245-HP	48" High Flow	90	3,210 lbs
160810-HP	18" High Flow, Severe Duty	46	2,050 lbs
160815-HP	24" High Flow, Severe Duty	56	2,300 lbs
160820-HP	30" High Flow, Severe Duty	66	2,550 lbs
160825-HP	40" High Flow, Severe Duty	76	3,000 lbs
160830-HP	48" High Flow, Severe Duty	106	3,200 lbs




The Cold Planer Drum, which shows the tooth standoffs that allow for a deeper cutting depth.

BROOMS



SEVERE DUTY ANGLE BROOM SERIES 2

- Hydraulic angle and bristle operate simultaneously
- Oversized main shaft spindles
- Massive bearings
- Floating head design with spring tensioner
- Welded heavy duty cylinder
- Grease fittings on pivot points
- 32" bristles with poly or poly/steel available
- 14-pin OEM connector available
- Optional water kit

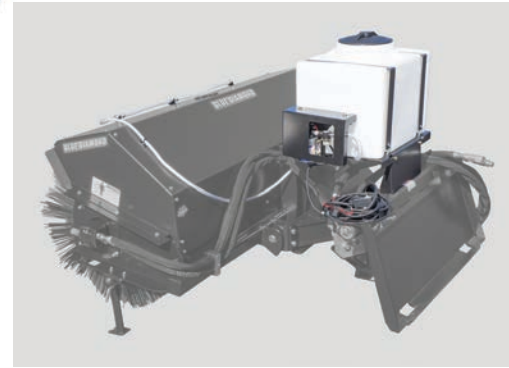

OPTIONAL WATER KIT



PICKUP BROOM SERIES 2

- Predrilled for optional pressurized water system
- Mounts for gutter brush included
- Bolt-on rubber skirting to contain debris
- Motor and shaft guards
- 1 1/2" x 7" zinc height-adjustment pins with 4 positions
- Heavy duty dump stops
- Grease fittings on all pivot points and bearings
- Steps mounted on back of bucket for entering and exiting the host machine



PART NUMBER	SIZE	WEIGHT
116512	60"	945 lbs
116517	72"	1390 lbs
116522	84"	1,585 lbs
116527	96"	1,765 lbs

* Water kit and gutter brush available for all models

VIBRATORY ROLLER & HYDRAULIC BREAKER



VIBRATORY ROLLER

- Industry leading bearing design
- Integral knockdown blade
- Smooth or pad foot models
- Exciter systems are oil mist lubricate
- Vibrating drums are effectively isolated from the roller frame
- 12 heavy duty rubber shock mounts
- Control valve block compensates for the correct flow of oil to prevent over speeding and over pressure of the exciter shaft
- Universal adapter plate
- Drive motor is inside a heavy duty steel frame



PART NUMBER	MODEL	WEIGHT
124010	73" Vibratory Roller, Smooth	2,050 lbs
124015	73" Vibratory Roller, Pad Foot	2,210 lbs
124030	84" Vibratory Roller, Smooth	2,300 lbs
124035	84" Vibratory Roller, Pad Foot	2,450 lbs



HYDRAULIC BREAKER - HAMMER

- 3-year warranty
- Mono-block design / no tie rods
- Anti-blank firing system
- Hydraulic brake
- No re-gassing needed
- Only 2 internal moving parts
- 2 speed control / variable stroke
- Quiet operation
- Self-regulating
- Body bushings around pist



PART NUMBER	MODEL	WORKING PRESSURE	MAX OIL FLOW	FREQUENCY (BPM)	OPERATING WEIGHT	TOOL DIAMETER	ENERGY CLASS	CARRIER WEIGHT	(PSI) BACK PRESSURE
135005	HB50	1,750	7	1,200	132 lbs	1.5	100	1,500-2,650 lbs	290-360
135009	HB95		11		220 lbs	1.8	200	2,650-4,000 lbs	
135016	HB165		13		370 lbs	2.2	400	4,000-6,600 lbs	
135021	HB210	900	16	1,100	463 lbs	2.5	500	6,100-9,900 lbs	363
135030	HB300		21.2		661 lbs	2.9	700	8,800-15,500 lbs	
135040	HB400		29.2		882 lbs	3.1	1,000	13,500-20,900 lbs	
135053	HB530		32		1,169 lbs	3.3	1,200	17,650-25,350 lbs	